

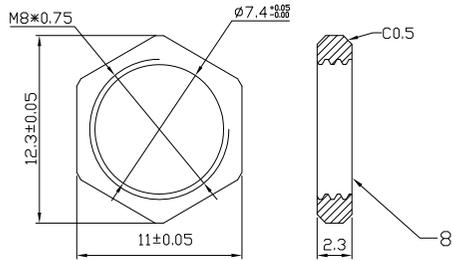
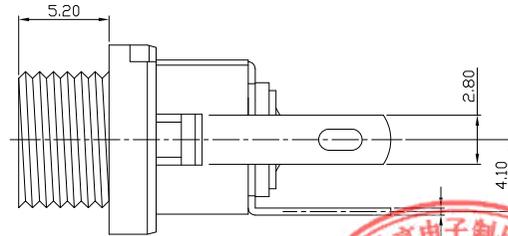


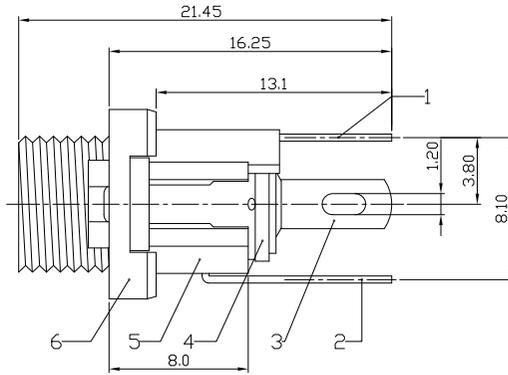


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

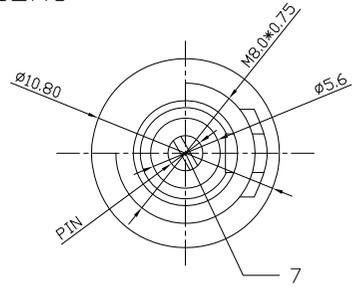

Nut

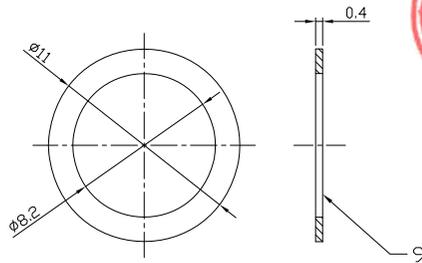

Washer

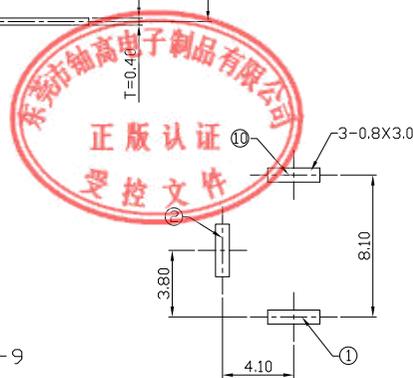

P.C.B LAYOUT

MODEL CODE:

DCE0-00260- A □ P0 BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter:

H=φ2.0 , I=φ2.35 , J=φ2.5

(5):Material of housing:

P□=POM

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

Specification:

1.Rating :DC 30V 0.3A.

2.Contact resistance :≤100mΩ.



3.Insulation resistance : ≥100MΩ (500VDC).

4.Withstanding voltage : 500VAC .

5.Insertion and extraction force : 0.3~3Kgs.

6.life test : 5000cycles min.

7.□peration temperature range:-25°C~85°C

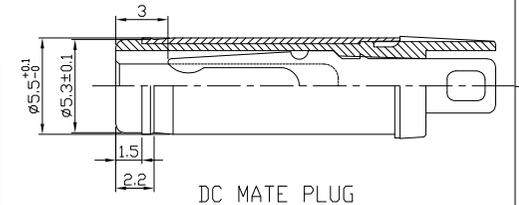

DC MATE PLUG

Model No.	H	I	J
CENTER PIN	φ2.0	φ2.35	φ2.5

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING
9	WASHER-2	SPCC	1	Ni PLATED
8	NUT	BRASS	1	Ni PLATED
7	PLUG PIN	BRASS	1	Ni PLATED
6	SOCKET	BRASS	1	Ni PLATED
5	CASE	POM	1	BLACK
4	WASHER-1	PAPER TAPE	2	RED
3	SPRING TERMINAL	PBS STRIP	1	Ag PLATED
2	CONTACT	BRASS STRIP	1	Ag PLATED
1	TERMINAL	BRASS STRIP	1	Ag PLATED

GENERAL TOLERANCE mm
WITHIN 1.5mm±0.1mm
OVER 1.5mm±0.2mm

SEE NOTE
SEE NOTE

FINISH
SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

东莞市铀高电子制品有限公司			
TITLE: DIP DC POWER JACK		PART NO.: DCE0-00260	
DR: Ricky 2019/03/18		DWG NO.: AZJ-00260	
CHKD: Ricky 2019/03/18		SCALE 1:1	SHEET 1/1
APPD:		REV. A	CUSTOMER DRAWING