





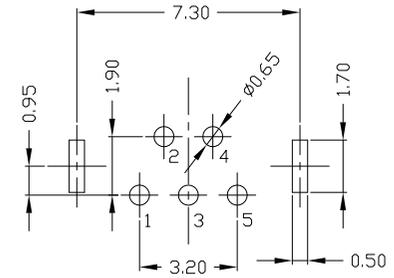


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

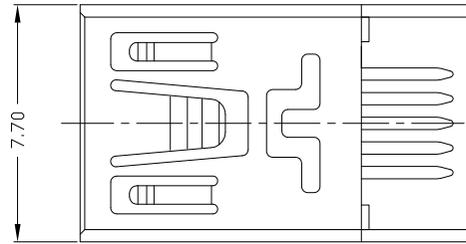

RECOMMENDED PCB LAYOUT

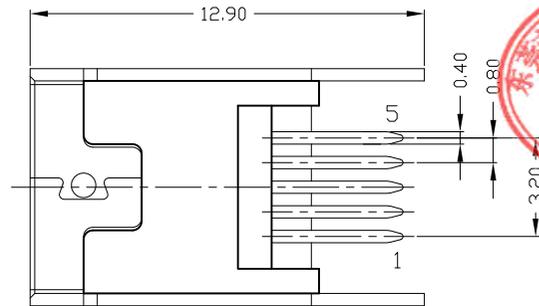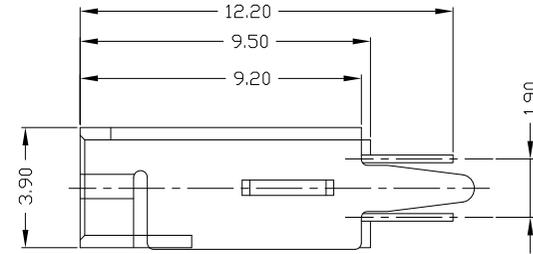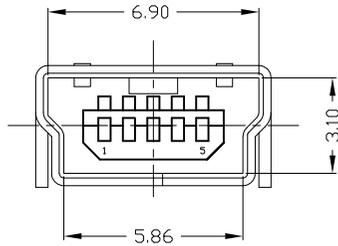

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- 4.PART NO.

MUBF-05*N-4BP83

1:Au 1U"
6:Au 30U"

W:WHITE
B:BLACK

1:PB
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	SEE NOTE	TITLE: MINI USB 5P/F180° DIP B型(直尖脚) 端子加长		PART NO.: MUBF-05*N-4BP83		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X.* ±1*		DR:	gan 2017/05/03		DWG NO.: AII-P83	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX*		FINISH	gan 2017/05/03		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	CHKD:	gan 2017/05/03		APPD:	

