

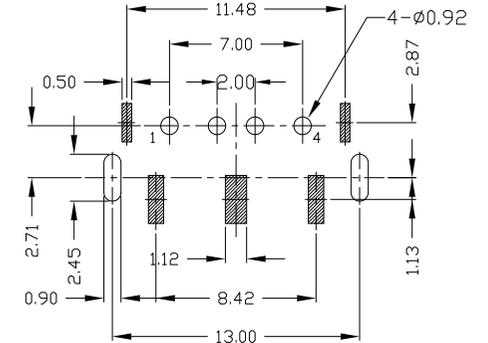
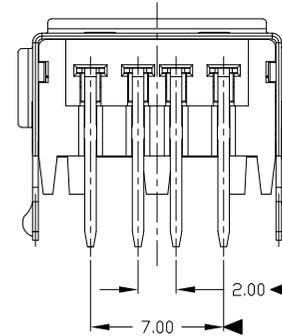
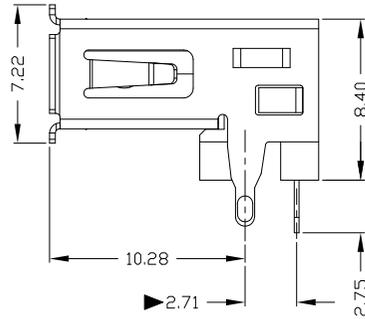
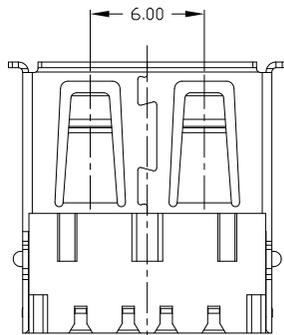


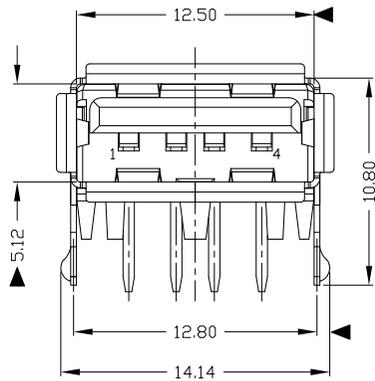

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	NO.	APPD.

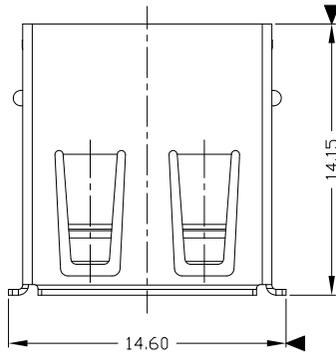

RECOMMENDED PCB LAYOUT



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ, MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R628
 1: Au 1U*
 6: Au 30U*
 W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司					
3	HOUSING	PBT	1	UL94V-0	.X ±0.30	.X' ±1'	MAT'L	SEE NOTE	TITLE: USB AF DIP 90度 墊高型H8.4 (外壳直脚有凸點)		PART NO.: USAF-04*N-1*R628			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	FINISH	SEE NOTE	DR: Ricky 2014/04/29		DWG NO.: AII-R628			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	Q'TY	SEE NOTE	CHKD: Ricky 2014/04/29		SCALE	SHEET	REV.	CUSTOMER DRAWING
									APPD:		1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.