







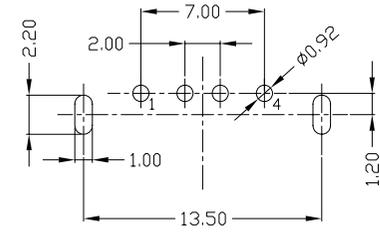


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

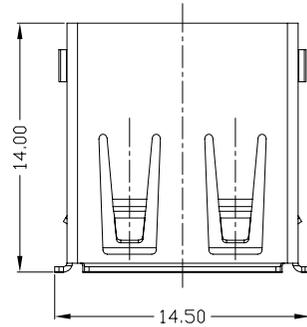

RECOMMENDED PCB LAYOUT

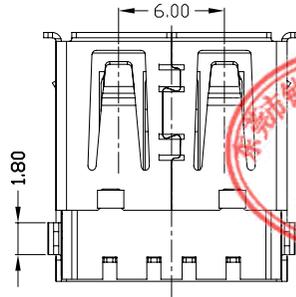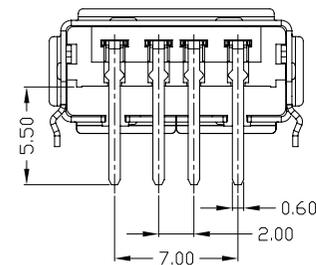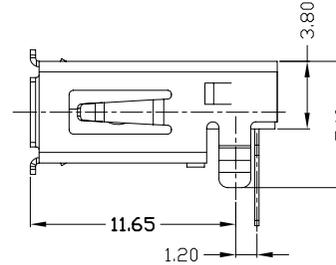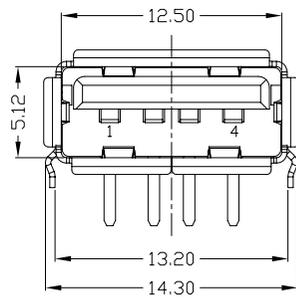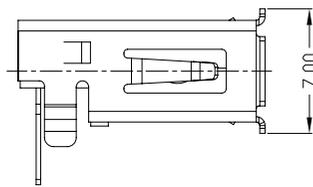

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩMIN;
- 3) CONTACT RESISTANCE: 30mΩMAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04\*N-1\*R634

- 1: Au 1U\*
- 6: Au 30U\*
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm	东莞市铀高电子制品有限公司					
					.X ±0.3	.X.* ±1*	MAT'L							
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX ±0.25	.XX*	SEE NOTE		TITLE: USB AF DIP 90度 沉板2E有卷边 (端子脚加长)	PART NO.: USAF-04*N-1*R634				
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE		DR: gan 2014/11/18	DWG NO.: AII-R634				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.				Q'TY	CHKD: gan 2014/11/18	SCALE	SHEET	REV.	CUSTOMER DRAWING
									APPD:	1:1	1/1	B		

