







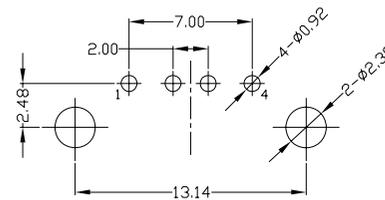


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

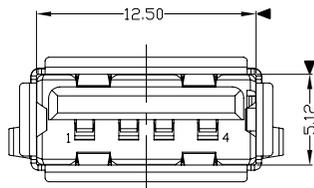

RECOMMEND PCB LAYOUT

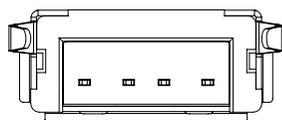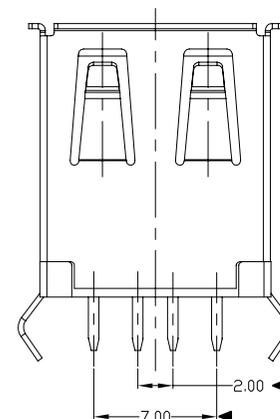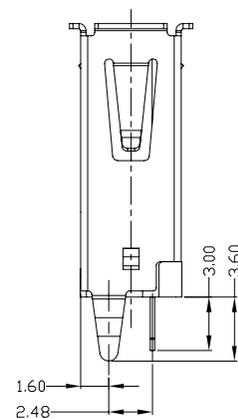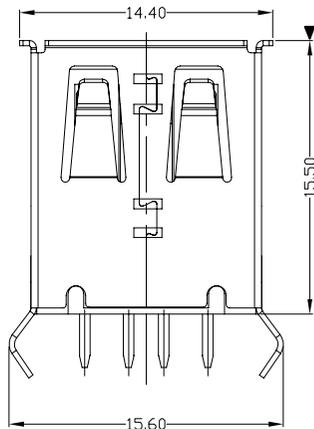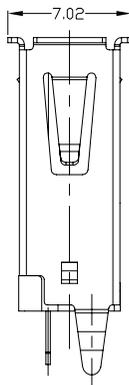

NOTES:

1) ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2) Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*PA8

- 1: Au 1U"
- 6: Au 30U"
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司						
4	COVER	PBT	1	UL94V-0	X. ±0.35	X.' ±2*	MAT'L	TITLE:		PART NO.:			
3	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X' ±1*		SEE NOTE	USB A/F 180° DIP(15.50)		USAF-04*N-1*PA8		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	DR:		DWG NO.:			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*		SEE NOTE	gan 2012/7/05		AII-PA8		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC		Q'TY	APPD:	gan 2012/7/05	SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	