

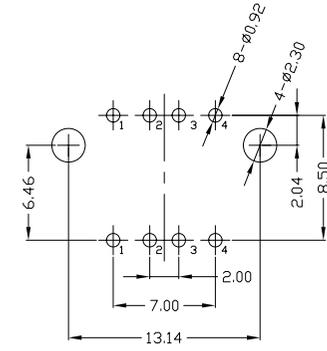
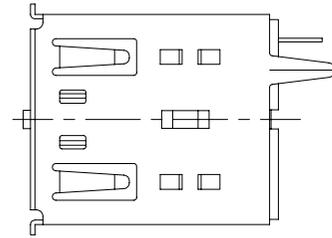


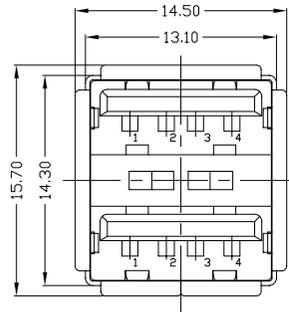


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

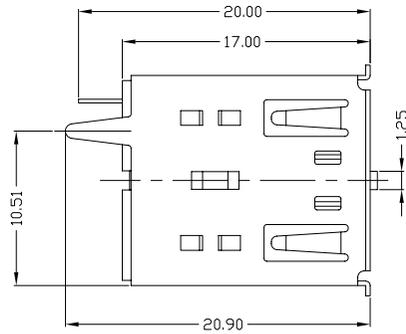

RECOMMENDED PCB LAYOUT

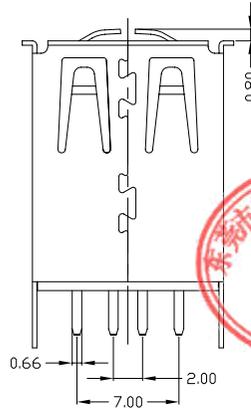

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 1000MΩMIN;
- 3) CONTACT RESISTANCE: 30mΩMAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08*N-1*P32

1: Au 1U'
6: Au 30U'

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.*	UNITS	东莞市铀高电子制品有限公司																																									
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.* ±2*	mm	<table border="1"> <tr> <td colspan="2">TITLE:</td> <td colspan="2">PART NO.:</td> </tr> <tr> <td colspan="2">USB AF 180° 双层插板长体(2直脚)</td> <td colspan="2">USAF-08*N-1*P32</td> </tr> <tr> <td colspan="2">DR: gan 2014/09/16</td> <td colspan="2">DWG NO.:</td> </tr> <tr> <td colspan="2">CHKD: gan 2014/09/16</td> <td colspan="2">AII-P32</td> </tr> <tr> <td colspan="2">APPD:</td> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> <td colspan="2">CUSTOMER DRAWING</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2"></td> <td>1:1</td> <td>1/1</td> <td>B</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </table>				TITLE:		PART NO.:		USB AF 180° 双层插板长体(2直脚)		USAF-08*N-1*P32		DR: gan 2014/09/16		DWG NO.:		CHKD: gan 2014/09/16		AII-P32		APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING								1:1	1/1	B						
TITLE:		PART NO.:																																															
USB AF 180° 双层插板长体(2直脚)		USAF-08*N-1*P32																																															
DR: gan 2014/09/16		DWG NO.:																																															
CHKD: gan 2014/09/16		AII-P32																																															
APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING																																												
		1:1	1/1	B																																													
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X.* ±1*	MAT'L																																										
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25	.XX.*	SEE NOTE																																										
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ±0.15	.XXX.*	FINISH																																										
				<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.</p>				Q'TY																																									