

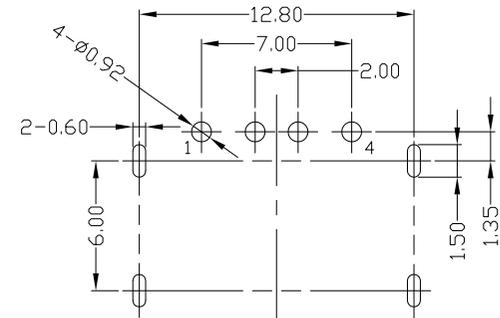






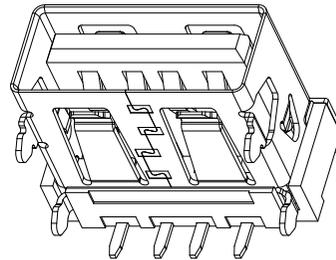


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

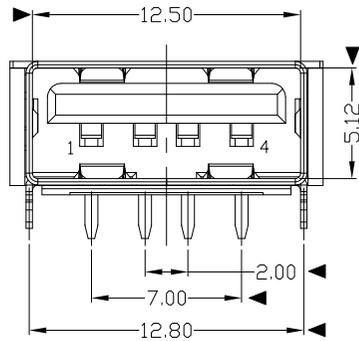

RECOMMENDED PCB LAYOUT

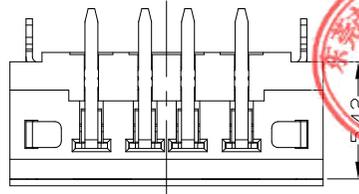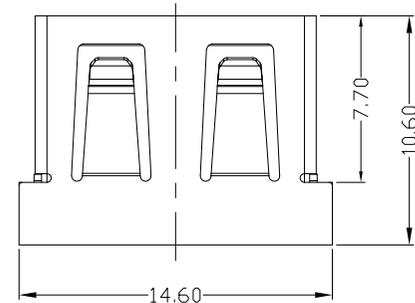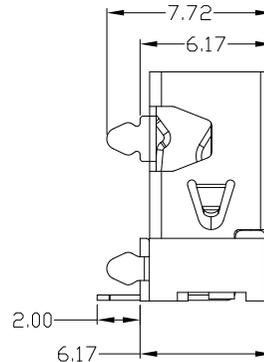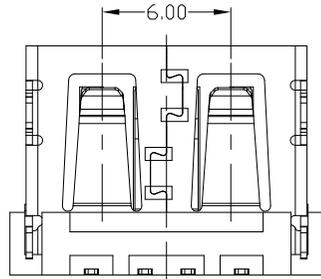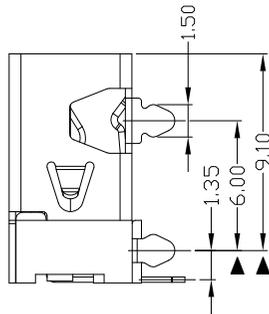

- NOTES:
- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 - 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO. USAF-04*N-***R602

1:Au 1U"
6:Au 30U"

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
3	HOUSING	PBT/LCP	1	UL94V-0	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: USB A/F 90° DIP 短体 10.6		PART NO.: USAF-04*N-***R602		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'		DR: gan 2012/6/29		DWG NO.: AII-R602		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'		CHKD: gan 2012/6/29		SCALE SHEET REV. CUSTOMER DRAWING		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.		Q'TY	APPD:	1:1	1/1	B	