

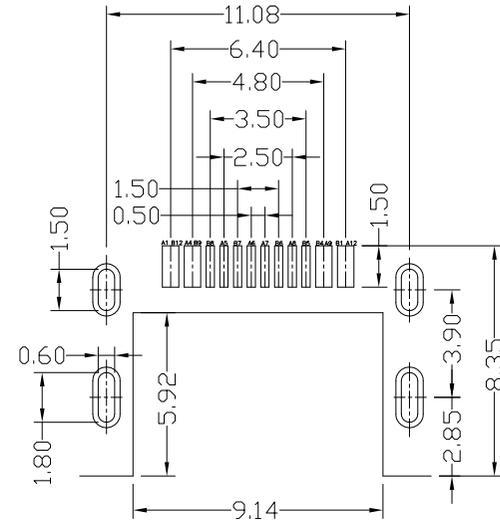



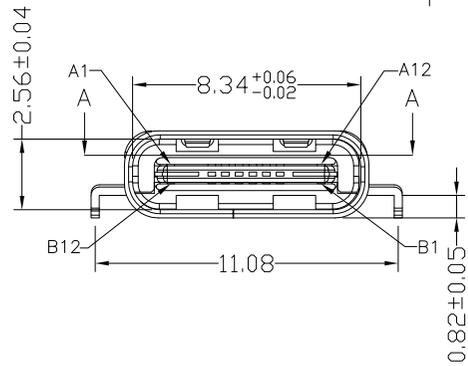


RoHS Compliant  
2002/95/EC  
Process Capable

REV.	ECN. NO.	APPD.

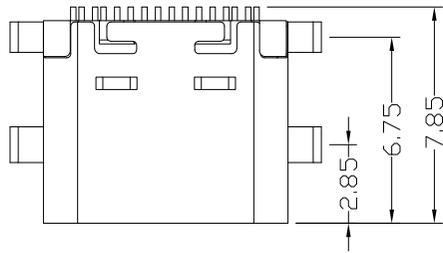


RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

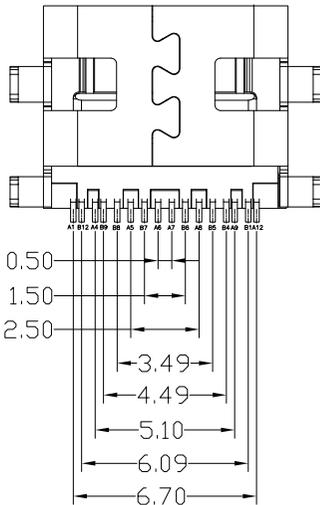

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



- NOTES:
- ELECTRICAL:
    - CURRENT RATING: 3AMP MAX;
    - INSULATION RESISTANCE: 100MΩ MIN 250V DC;
    - CONTACT RESISTANCE: 40mΩ MAX;
    - WITHSTANDING VOLTAGE: 100V AC;
    - OPERATING TEMPERATURE: -30°C TO +85°C.
  - Mechanical:
    - Mating Force: 20N MAX.
    - Unmating Force: 6N MIN.
  - DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

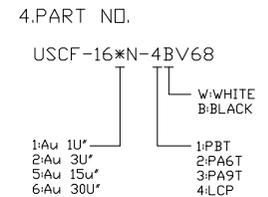

5				.X ±0.30	.X' ±1'	UNITS	东莞市铀高电子制品有限公司						
4	HOOK	STAINLESS STEEL	1	.XX ±0.20	.XX'	MAT'L							
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.10	.XXX'	SEE NOTE	TITLE:	PART NO.:				
2	TERMINAL	COPPER ALLOY	16	PLATED GOLD			SEE NOTE	DR:	USCF-16XN-4BV68				
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	CHKD:	AII-V68				
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING	
									1:1	1/1	B		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC